


Smartglass Installation Instruction

Please note the following informations during the smartglass installation process!

- * Switchable glass is basically operated with alternating voltage!
- * The connection between the transformer and the glass must be made with 0.75mm² cable
- * The transformers specified by the manufacturer of the glass must be used
- * Every glass has at least two connections on at least one side (or on several)
- * One connector is on the front and one on the back of the built-in laminate
- * Each connection is made with two short copper strips from the glass (one is in reserve to be on the safe side!)
- * Only one connection from the front and one connection from the rear may be connected to the transformer
- * After soldering the cables, all connections must be insulated against contact (adhesive tape, fabric tape ...)
- * Only acid free (neutral) glue or silicon is allowed to use for the installation (Delamination!!)



* In wet or damp rooms, all connection points and all edges must be built with silicone in such a way that they are 100% impermeable to water / moisture !!

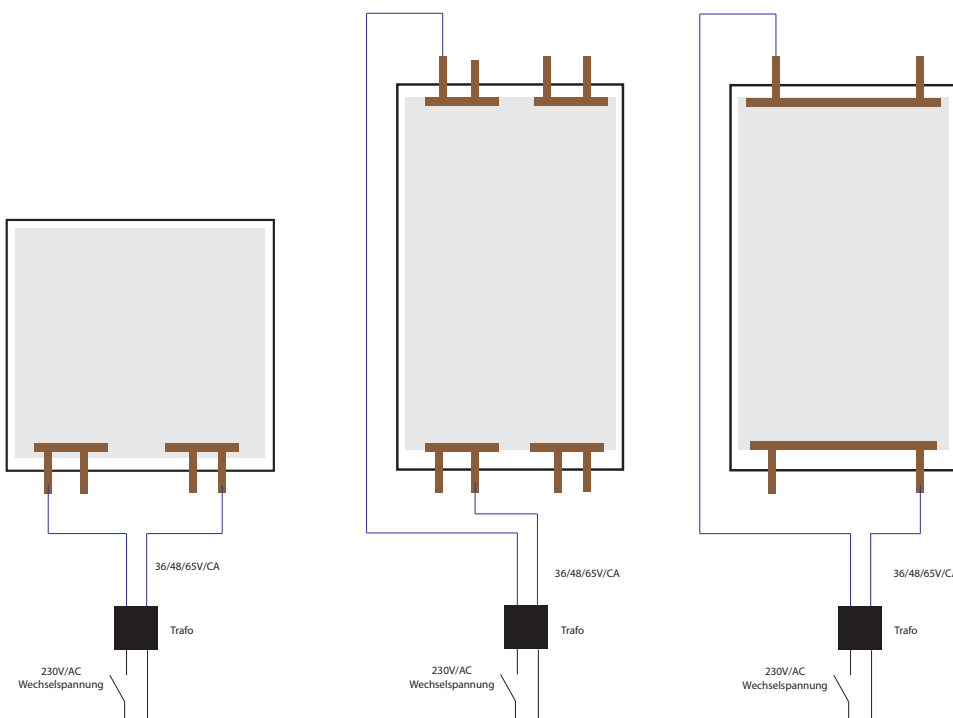

IMPORTANT:

Check every delivery immediately after taking over the function and completeness!

Check every single glass function before installation by It with the supplied Connect transformer!

To prevent delamination must have switchable glass on all four sides built into a frame!

If there are no cables on the glass be prepared to contact theirs Reseller !